


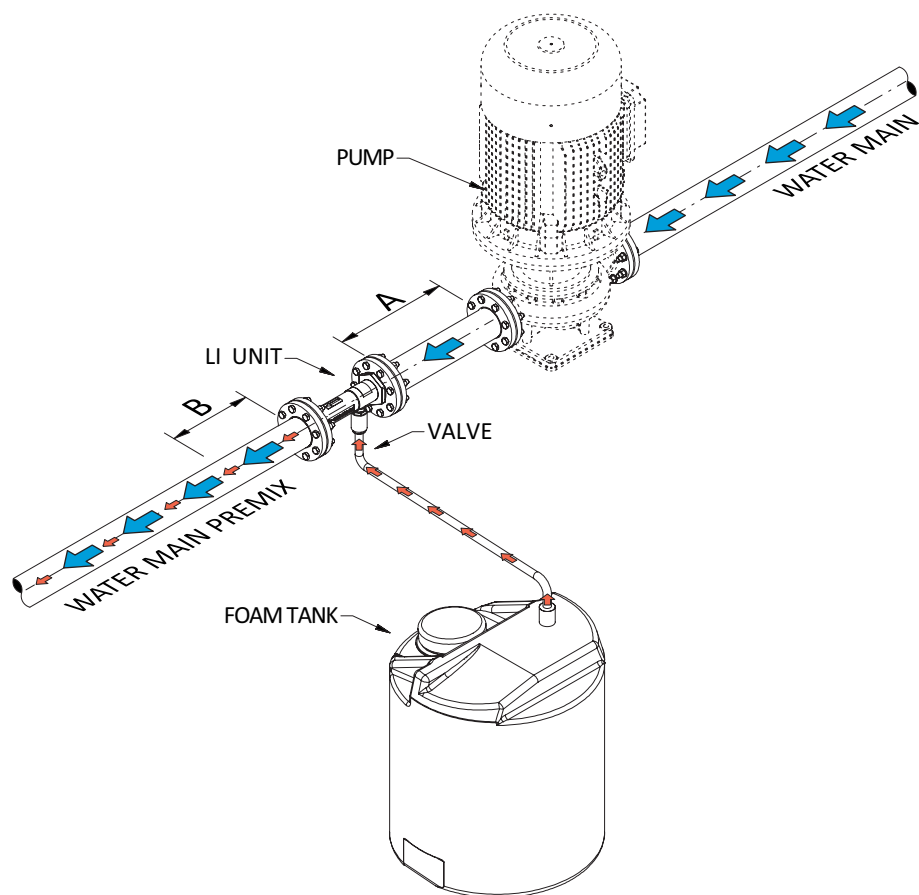


Instruction:

- Mount according to working principle show on the left with arrow on LI unit indicating flow direction pointing downstream from pump (if present).
- LI Unit should be installed with a minimum straight pipe length of approximately 5 pipe diameters before unit and 3 pipe diameter after. This ensures correct foam mixing ratio.
- Foam concentrate surface should be below LI unit to ensure no siphon effect. Otherwise valve must be added to the foam concentrate line.

MINIMUM INSTALLATION MEASUREMENTS

MODEL	LI-25	LI-40	LI-80	LI-100	LI-150
A Min. straight length before LI Unit (~5 x Pipe Ø)	170mm	250mm	450mm	570mm	840mm
B Min. straight length after LI Unit (~3 x Pipe Ø)	100mm	150mm	270mm	350mm	500mm

LI-25, -40

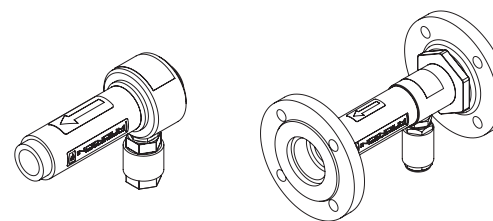

LI-80, -100, -150

