


**Instruction:**

- Mount according to above working principle with arrow on TSR unit indicating flow direction pointing towards protected tank.

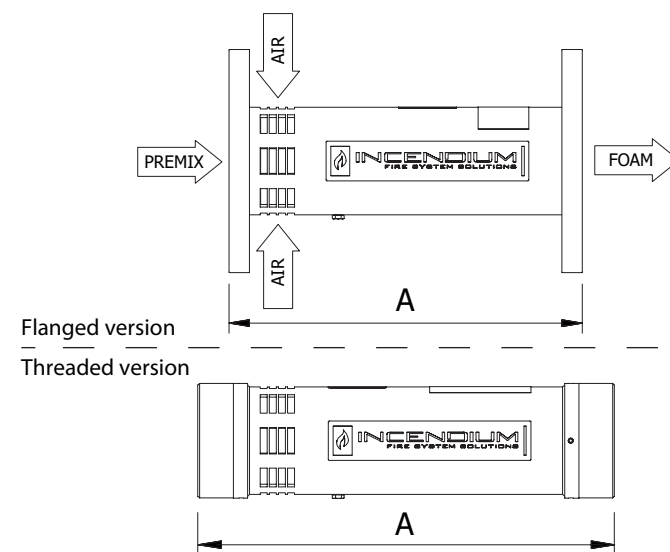

**DIMENSIONAL DATA**

Model	Length A [mm]	Connection	Weight [kg]
TSR-50	210	DIN DN50 PN16 or 2" ANSI 150lbs	6
TSR-50 T	292	2" BSP Female	2
TSR-80	280	DIN DN80 PN16 or 3" ANSI 150lbs	11
TSR-80 T	388	3" BSP Female	4,5
TSR-100	352	DIN DN100 PN16 or 4" ANSI 150lbs	14
TSR-100 T	411	4" BSP Male	5,5