
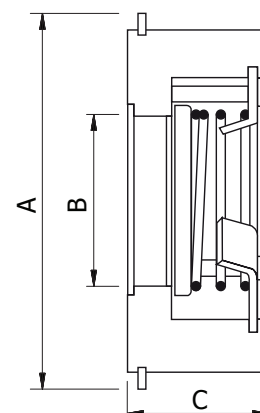


Disc Check Valve

The Disc Check Valve (DCV) is a spring loaded check valve for mounting between flanges. It is made with the highest quality corrosive resistant stainless steel with Viton gaskets and is therefore highly suitable for use in foam concentrate lines.

The DCV is often used in pump proportioning systems and can be mounted in either horizontal or vertical position.



Material:

House:	Stainless Steel (316/316L)
Disc:	Stainless Steel (316/316L)
Spring:	Stainless steel (316 Ti)
Seals*:	Viton

*Optional NBR, EPDM or PTFE

Product Features

- High seal security
- Cost effective design
- Maintenance free design
- Low weight
- Working temperature range -25°C to +220°C
- Working pressure PN16

DIMENSIONAL DATA

Model	Length [mm]			Weight [kg]
	A	B	C	
DCV-15	51	15	17	0,15
DCV-20	61	20	20	0,25
DCV-25	71	25	23	0,3
DCV-32	82	32	28	0,6
DCV-40	92	40	31,5	0,8
DCV-50	108	48,5	40	1,3
DCV-65	127	63	46	2,0
DCV-80	142	77	51	2,3
DCV-100	162	96	61	3,5

All parts have been selected for reliable and trouble free service using corrosion resistant materials for low maintenance.