
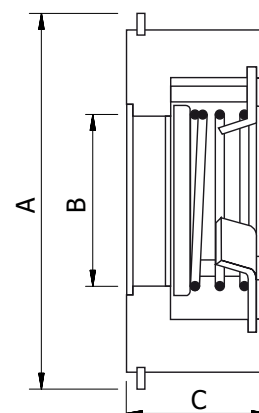


## Disc Check Valve

Incendium Disc Check Valve (DCV) is a spring loaded check valve for mounting between flanges. It is made with the highest quality corrosive resistant stainless steel with Viton gaskets and is therefore highly suitable for use in foam concentrate lines.

The DCV is often used in pump proportioning systems and can be mounted in either horizontal or vertical position.



### Material:

House:	Stainless Steel (316/316L)
Disc:	Stainless Steel (316/316L)
Spring:	Stainless steel (316 Ti)
Seals*:	Viton

\*Optional NBR, EPDM or PTFE

### Product Features

- High seal security
- Cost effective design
- Maintenance free design
- Low weight
- Working temperature range -25°C to +220°C
- Working pressure PN16

### DIMENSIONAL DATA

Model	Length [mm]			Weight [kg]
	A	B	C	
DCV-15	157	165	108	0,15
DCV-20	203	135	108	0,25
DCV-25	162	165	118	0,3
DCV-32	208	135	118	0,3
DCV-40	188	165	132	0,8
DCV-50	234	135	132	1,3
DCV-65	194	165	138	2
DCV-80	240	135	138	2,3
DCV-100	215	230	150	3,5

All parts have been selected for reliable and trouble free service using corrosion resistant materials for low maintenance.